

Product Data Sheet



ASMACO MOTOR STARTER SPRAY

Product Description:

ASMACO MOTOR STARTER SPRAY is a special aerosol product which is suitable for the easy and safe starting of engines. The safe cold starting of all engines is made possible by a special combination of ingredients. Starter Spray is ideal at low temperatures, in damp weather or after longer engine downtimes. The spray protects both the engine and the battery.

Starter Spray is suited for both diesel and petrol engines. Whether with or without a catalytic converter, whether a motor vehicle, construction machinery, agricultural machinery, chain saws, lawn mowers, boat engines, motorcycles or scooters. ASMACO Starter Spray can be used everywhere.

Key Performance Properties:

- Contains special lubricating additives that exclude wear and micro-pressure of the cylinder-piston group when starting the engine.
- Protects the engine from corrosion.
- Extends the life of the engine and battery when used regularly.
- Improves the ignition of fuel.
- Has an increased calorific value and provides uniform and complete combustion of the fuel-air mixture.
- Economically.

Applications:

Agricultural machinery, motorcycles, mopeds, ATVs, snowmobiles, chainsaws, gas tools, garden equipment, as well as marine and boat engines of all types, compressor engines, etc. generators.

Typical Properties:

	Unit	Specification
Appearance	--	Liquid in Aerosol Can
Colors	--	Water white
Odors	--	solvents
Specific gravity	--	0.79 ± 0.05
Pressure in can	Bar	4.5 ± 1

Instructions:

- Shake the CAN.
- Spray the product directly into the air filter or intake duct for 5-7 seconds, and then start the engine immediately.
- For petrol engines, press the gas pedal slightly.
- For diesel engines, press the gas pedal against failure.
- Do not spray on the spark plugs and parts of the heating system.

Restriction:

- Store under temperature of 5°C, keep cool in ventilated and dry place.
- Keep away from the fire hazard and high temperature
- Do not puncture or set fire to can.
- Keep out of reach of children
- Eye Irritant: Rinse eyes thoroughly with plenty of water.


Shelf life:

24 months when stored at 20 °C / 50% relative humidity out of direct sunlight.

Packaging:

ASMACO MOTOR STARTER SPRAY 400ml (12 pcs)

www.anchorallied.com

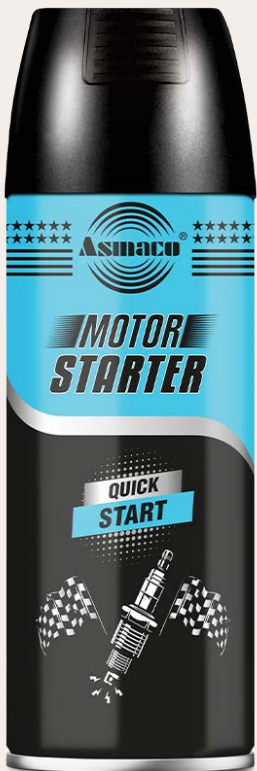

**MOTOR
STARTER**

Quick Start

Product Data Sheet



Shipping Limitations: None

Note

The information and data contained in the product data sheet is believed to be accurate and reliable; however, it is the user's responsibility to determine suitability of the product for usage. Since the supplier cannot know all the uses, or the conditions of use to which the product may be exposed, no warranties concerning the fitness or suitability for particular use or purpose are made. It is the user's responsibility to thoroughly test any proposed use of our products and independently conclude satisfactory performance in the application. Likewise if the application, product specifications or manner in which our products are used require government approval or clearance, it is the sole responsibility of the user to obtain sure authorization.

Non – Warranty: Because the storage, handling and application of the material is beyond Anchor Allied Factory Ltd's control, we can accept no liability for the result obtained. Anchor Allied Factory Ltd's sole limited warranty is the product meets the manufacturing specifications in effect at the time of shipment. There is no warranty or merchantability or fitness for use, nor any expressed or implied warranty. Anchor Allied Factory Ltd will not be liable for any incidental and consequential damage of any kind. The exclusive remedy for breach of such limited warranty is a replacement of any product shown to be other than warranted. Suggestions of uses should not be taken as inducement to infringe any patents.



مصنع انكور الايد ذ.م.م.
ANCHOR ALLIED FACTORY L.L.C.

Tel. No.: +971 6 5342091, Fax No.: +971 6 5342107

P.O. Box No.: 21152, Sharjah (U.A.E.), E-mail : info@anchorallied.com.



SILICONE SEALANTS • WATERPROOFING COATINGS • PU SEALANTS • POLYSULPHIDE SEALANTS • ACRYLIC & DUCT SEALANTS
POLYURETHANE FOAM • SPRAY PAINT • SILVER CLOTH DUCT TAPE • CREPE PAPER MASKING TAPE • ALUMINIUM FOIL TAPE
P.E. PROTECTION TAPE • PVC PIPE WRAP TAPE • CONTACT ADHESIVE • EPOXY STEEL • PVC CEMENTS • SUPER GLUE

