

# Product Data Sheet



## ASMACO RS-20 PRO RUST REMOVER AND LUBRICANT

### Product Description:

ASMACO RS-20 PRO Rust remover and lubricant Provides a high-grade lubricating agent based on a mixture of oils and penetrants in a blend of solvents. It provides protection from rust and corrosion on metal objects. It has been formulated to offer quick and easy removal of seized and rusted components. Cleanly lubricates Stops squeaks and protects against rust invasion. Frees sticky joints.

### Key Performance Properties:


- Frees Sticky joints.
- Stop squeaks & protects against rust invasion.
- Cleans & Lubricates.
- Can be painted
- Penetrates & loosens tight, seized, rusty nuts & bolts.
- Removes moisture, Starts wet motors
- CFC Free
- Silicone Free

### Applications:

Directly spray or use the nozzle provided on the effected part to achieve the desired results. Best for Automobile, Marine, garage, Home, Industry, Shops.  
Compatibility: It will not affect Rubber, Plastic and metal surface.

### Typical Properties:

Appearance	Aerosol Liquid
Color	Light brown to amber
Odor	Solvent
Specific Gravity	0.81 +/- 0.02
Inside pressure (m. Pa)	0.45 +/- 0.05
Quantity per can	480ml
Spray ability	Satisfactory
Solubility in water	Insoluble
Film Thickness	515- $\mu$ m
Corrosion Protection (ASTM B 117)	015- % in 72 hours
Application warranty Outdoor	814- month
Application warranty Indoor	24 – 30 month

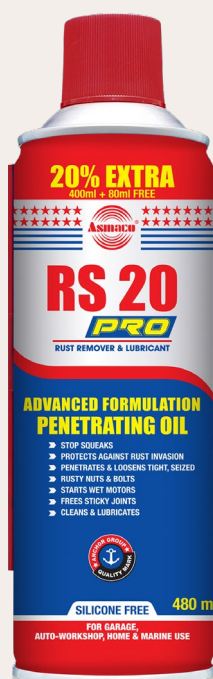

### ASMACO RS-20 PRO Rust Remover & Lubricant

CFC Free

Silicone Free

# Product Data Sheet



## Caution

Do not use near flame or any engine while it is running. Pressurized can protect from heat, do not expose to temperature exceeding 50°C. Do not spray on naked flame or incandescent material. Do not breathe vapor/spray. Keep away from sources of ignition. Do not spray on live electrical equipment where sparking may occur. Use only in a well ventilated area. It may cause irritation to skin and eyes because it contains petroleum distillate. If swallowed do not induce vomiting, call a physician.

## Storage and Shelf Life:

36 months when stored at 25°C (70°F) / 50% relative humidity out of direct sunlight. Do not expose to temperatures exceeding 500C because the cans contain pressurized gas. It may burn above 50°C. Do not pierce or burn even after use. Do not spray on naked flame or any incandescent materials. Keep out of reach of children.

## Packaging:

ASMACO RS 20 PRO 480 ml - 24 CANS/CTN

## Shipping Limitations: None

### Note

The information and data contained in the product data sheet is believed to be accurate and reliable; however, it is the user's responsibility to determine suitability of the product for usage. Since the supplier cannot know all the uses, or the conditions of use to which the product may be exposed, no warranties concerning the fitness or suitability for particular use or purpose are made. It is the user's responsibility to thoroughly test any proposed use of our products and independently conclude satisfactory performance in the application. Likewise if the application, product specifications or manner in which our products are used require government approval or clearance, it is the sole responsibility of the user to obtain sure authorization.

**Non – Warranty:** Because the storage, handling and application of the material is beyond Anchor Allied Factory Ltd's control, we can accept no liability for the result obtained. Anchor Allied Factory Ltd's sole limited warranty is the product meets the manufacturing specifications in effect at the time of shipment. There is no warranty or merchantability or fitness for use, nor any expressed or implied warranty. Anchor Allied Factory Ltd will not be liable for any incidental and consequential damage of any kind. The exclusive remedy for breach of such limited warranty is a replacement of any product shown to be other than warranted. Suggestions of uses should not be taken as inducement to infringe any patents.



Tel. No.: +971 6 5342091, Fax No.: +971 6 5342107

P.O. Box No.: 21152, Sharjah (U.A.E.), E-mail : info@anchorallied.com.



SILICONE SEALANTS • WATERPROOFING COATINGS • PU SEALANTS • POLYSULPHIDE SEALANTS • ACRYLIC & DUCT SEALANTS  
POLYURETHANE FOAM • SPRAY PAINT • SILVER CLOTH DUCT TAPE • CREPE PAPER MASKING TAPE • ALUMINIUM FOIL TAPE  
P.E. PROTECTION TAPE • PVC PIPE WRAP TAPE • CONTACT ADHESIVE • EPOXY STEEL • PVC CEMENTS • SUPER GLUE