

# Product Data Sheet



## ASMACO ELECTRONIC CONTACT CLEANER

### Product Description:

ASMACO Electronic Contact Cleaner is specially design for the cleaning of Sensitive electrical/electronic parts. It is suitable for the removal of light contaminations, dirt, dust carbon, light oils and finger prints with leaving no residue. Safe for most rubbers, plastics, and coatings.

Test before use on rubber, sensitive plastic parts.

### Key Performance Properties:

- Safe on metal surfaces, does not stain.
- Nonconductive
- Noncorrosive
- Does not leave a residue
- Zero ozone depletion potential
- Convenient 360° spray valve for aerosols.
- Safe on most rubber, plastics and coatings. Test on sensitive or stressed materials before use.

### Applications:


- Fast cleaning action for removal of flux traces, dust, dirt, light oils, finger prints and other contamination.
- Control assemblies
- Electromechanical assemblies
- All electrical contacts
- Printed circuit boards
- Sensors.
- Electronic components

### Direction For Use:

- Spray liberally and allow to run off.
- Use extension tube for more precise application.
- Use only with adequate ventilation.
- Do not use on sensitive electronic equipment.
- Allow to dry completely before reactivation.
- Protect and re lubricate if necessary.
- Do not use on energized equipment
- To remove oxide and carbon deposits, use an abrasive and rinse off with ASMACO electronic contact cleaner.

### RESTRICTION:

- Highly flammable product, not to be used on live equipment.
- Do not expose to temperatures exceeding 500C
- Do not spray on naked flame or any incandescent materials.
- Keep out of reach of children.
- Do not pierce or burn even after use.
- It may burn above 50°C

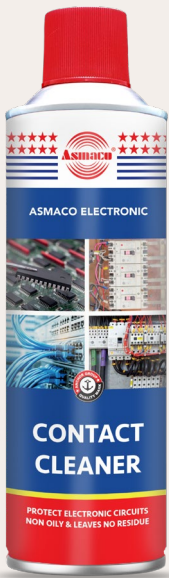

## ASMACO ELECTRONIC CONTACT CLEANER

# Product Data Sheet



## Typical Properties:

Appearance	Liquid
Color	Colorless
Odor	Solvent
Density	0.689 g/cm <sup>3</sup> @20°C
Flash Point	< 0°C (Closed Cup)
Inside pressure (m.pa) @ 28 °C	0.40 ± 0.10
Auto ignition Temperature	> 200°C

## Storage and Shelf Life:

The shelf life of ASMACO ELECTRONIC CONTACT CLEANER is 3 years when stored under normal condition of temperature and pressure away from direct sunlight. Do not expose to temperatures exceeding 500C because the cans contain pressurized gas. It may burn above 50°C. Do not pierce or burn even after use. Do not spray on naked flame or any incandescent materials. Keep out of reach of children.

## Packaging:

ASMACO ELECTRONIC CONTACT CLEANER 400 ML - 12 CANS/CTN

## Shipping Limitations: None

### Note

The information and data contained in the product data sheet is believed to be accurate and reliable; however, it is the user's responsibility to determine suitability of the product for usage. Since the supplier cannot know all the uses, or the conditions of use to which the product may be exposed, no warranties concerning the fitness or suitability for particular use or purpose are made. It is the user's responsibility to thoroughly test any proposed use of our products and independently conclude satisfactory performance in the application Likewise if the application, product specifications or manner in which our products are used require government approval or clearance, it is the sole responsibility of the user to obtain sure authorization.

**Non – Warranty:** Because the storage, handling and application of the material is beyond Anchor Allied Factory Ltd's control, we can accept no liability for the result obtained. Anchor Allied Factory Ltd's sole limited warranty is the product meets the manufacturing specifications in effect at the time of shipment. There is no warranty or merchantability or fitness for use, nor any expressed or implied warranty. Anchor Allied Factory Ltd will not be liable for any incidental and consequential damage of any kind. The exclusive remedy for breach of such limited warranty is a replacement of any product shown to be other than warranted. Suggestions of uses should not be taken as inducement to infringe any patents.



مصنع انكور الايد ذ.م.م  
**ANCHOR ALLIED FACTORY L.L.C.**

Tel. No.: +971 6 5342091, Fax No.: +971 6 5342107  
P.O. Box No.: 21152, Sharjah (U.A.E.), E-mail : info@anchorallied.com.



SILICONE SEALANTS • WATERPROOFING COATINGS • PU SEALANTS • POLYSULPHIDE SEALANTS • ACRYLIC & DUCT SEALANTS  
POLYURETHANE FOAM • SPRAY PAINT • SILVER CLOTH DUCT TAPE • CREPE PAPER MASKING TAPE • ALUMINIUM FOIL TAPE  
P.E. PROTECTION TAPE • PVC PIPE WRAP TAPE • CONTACT ADHESIVE • EPOXY STEEL • PVC CEMENTS • SUPER GLUE